

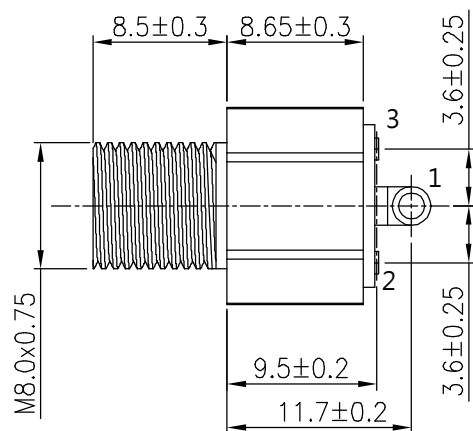
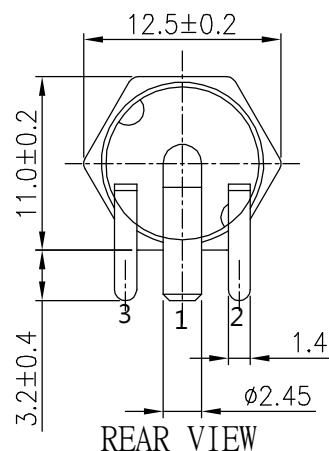


* RoHS COMPLIANT *




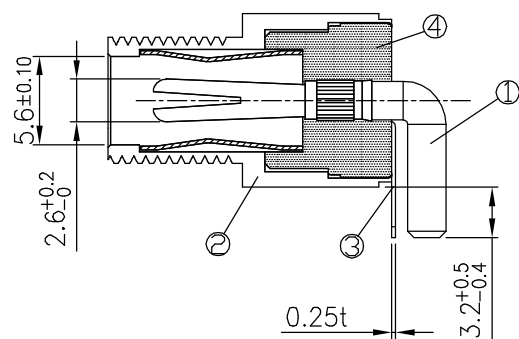


BOTTOM VIEW

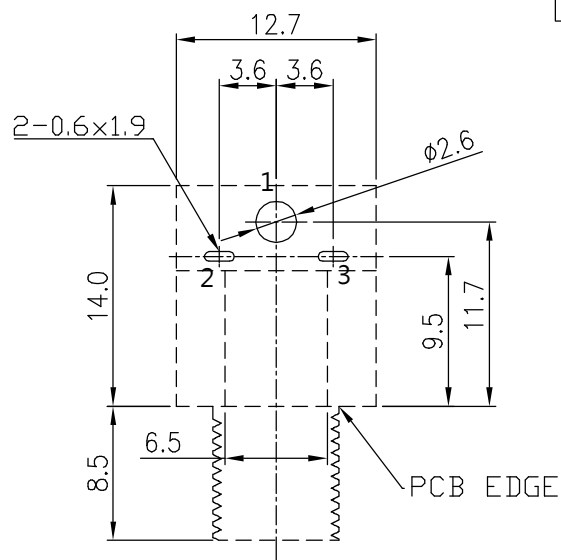

PCB LAYOUT
(TOP VIEW)

- 1.Dielectric strength: AC 500V/1 minute
- 2.Insulation resistance : 100MΩ or over. (DC 500V)
- 3.Contact resistance : 30mΩ or less
- 4.Rated voltage: 20 V
- 5.Rated current: 10 A

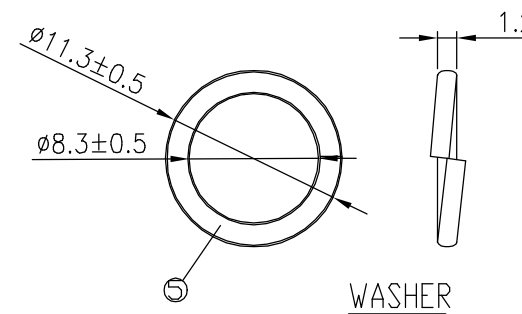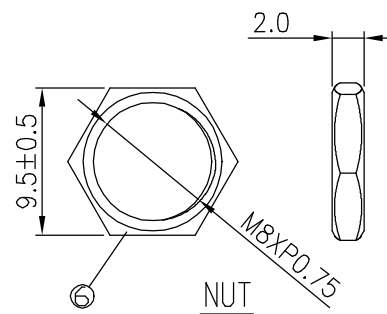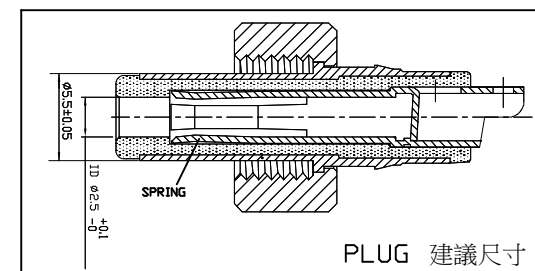

6	NUT	1	H59(COPPER ALLOY)	Cu/Sn	PLATED
5	WASHER	1	H59(COPPER ALLOY)	Cu/Sn	PLATED
4	DIELECTRIC	1	PBT	BLACK	
3	TERMINAL	1	C5191	Ag	PLATED
2	SLEEVE	1	Hpb59-1(C3604)	Cu/Sn	PLATED
1	PIN	1	Phosphor Bronze	Ag	PLATED

LTR	PART NAME	QTY	MATERIAL	REMARK
DWN	LILY	DATE	2021.08.06	3RD ANGLE PROJECTION
CHKD	ANDY	DATE	2021.08.06	UNIT: mm
APVD	JON	DATE	2021.08.06	

UNLESS OTHERWISE SPECIFIED TOLERANCES	
DECIMALS:	ANGLES:
X ± 0.3	X ± 1°
X.X ± 0.2	X.X ± 0.5°
X.XX ± 0.1	
X.XXX ± 0.05	

JKCR Electronics Co., Ltd.

NAME	DC POWER JACK
CAT. NO.	DCD-020-105J3B
DWN.NO.	B-020-105
	002