
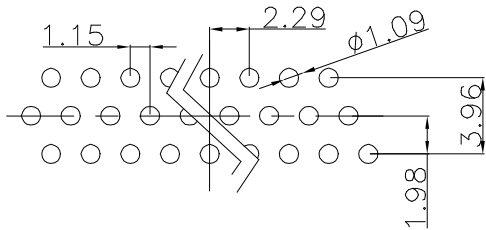
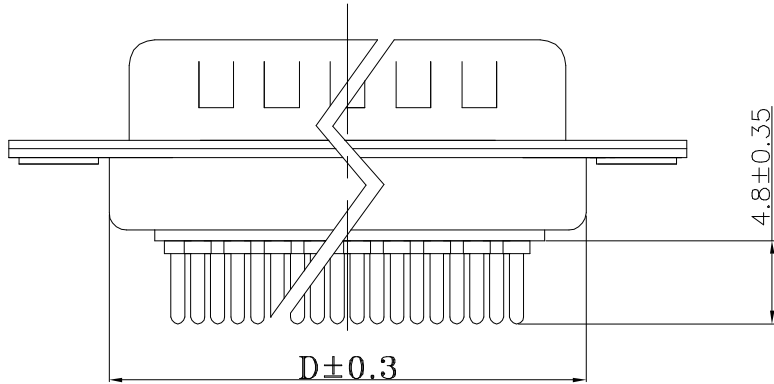



* RoHS COMPLIANT *

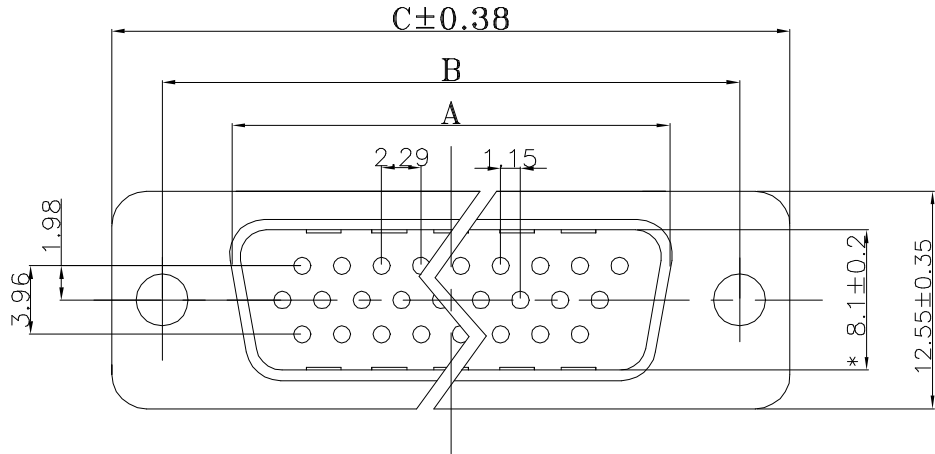

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ±0.3

* REVISIONS

LTR	DESCRIPTION	DATE	REVISED	APPROVED

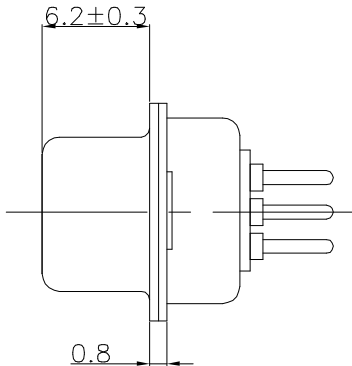

MATERIAL:

- 1 INSULATOR:PBT+30% GLASS FIBER(UL94-0).
- 2 CONTACT:BRASS.
- 3 CONTACT PLATED:GOLD FLASH PLATED ON CONTACT AREA AND TIN ON SOLDER TAIL ALL WITH NICKEL UNDERPLATING.
- 4 SHELL:STEEL NICKEL PLATED.
- 5 CONTACTS:15P,26P,44P,62P.

SPEIFICATION:

- 1 RATting CURRENT:5AMPS.
- 2 INSULATION RESISTANCE:1000MΩ MIN.AT 500V
- 3 DIELECTRIC STRENGTH:500V FOR ONE MINUTE.
- 4 OPERATION TEMPERATURE:-500° TO +105°C

POS.	A±0. 2	B±0. 2	C±0. 2	D±0. 2
15	16. 92	24. 99	30. 81	19. 24
26	25. 25	33. 30	39. 20	27. 70
44	38. 96	47. 04	53. 04	41. 30

DWN	LILY	DATE	2025.06.05	3RD ANGLE PROJECTION	NAME
CHKD	ANDY	DATE	2025.06.05		HDP XP MALE 180度DIP
APVD	JON	DATE	2025.06.05	UNIT: mm	CAT. NO.
JKCR Electronics Co., Ltd.					JCD-A29MXX-GD07
					DWN.NO.
					ZM-A29MXX-GD07
					001