



* RoHS COMPLIANT *

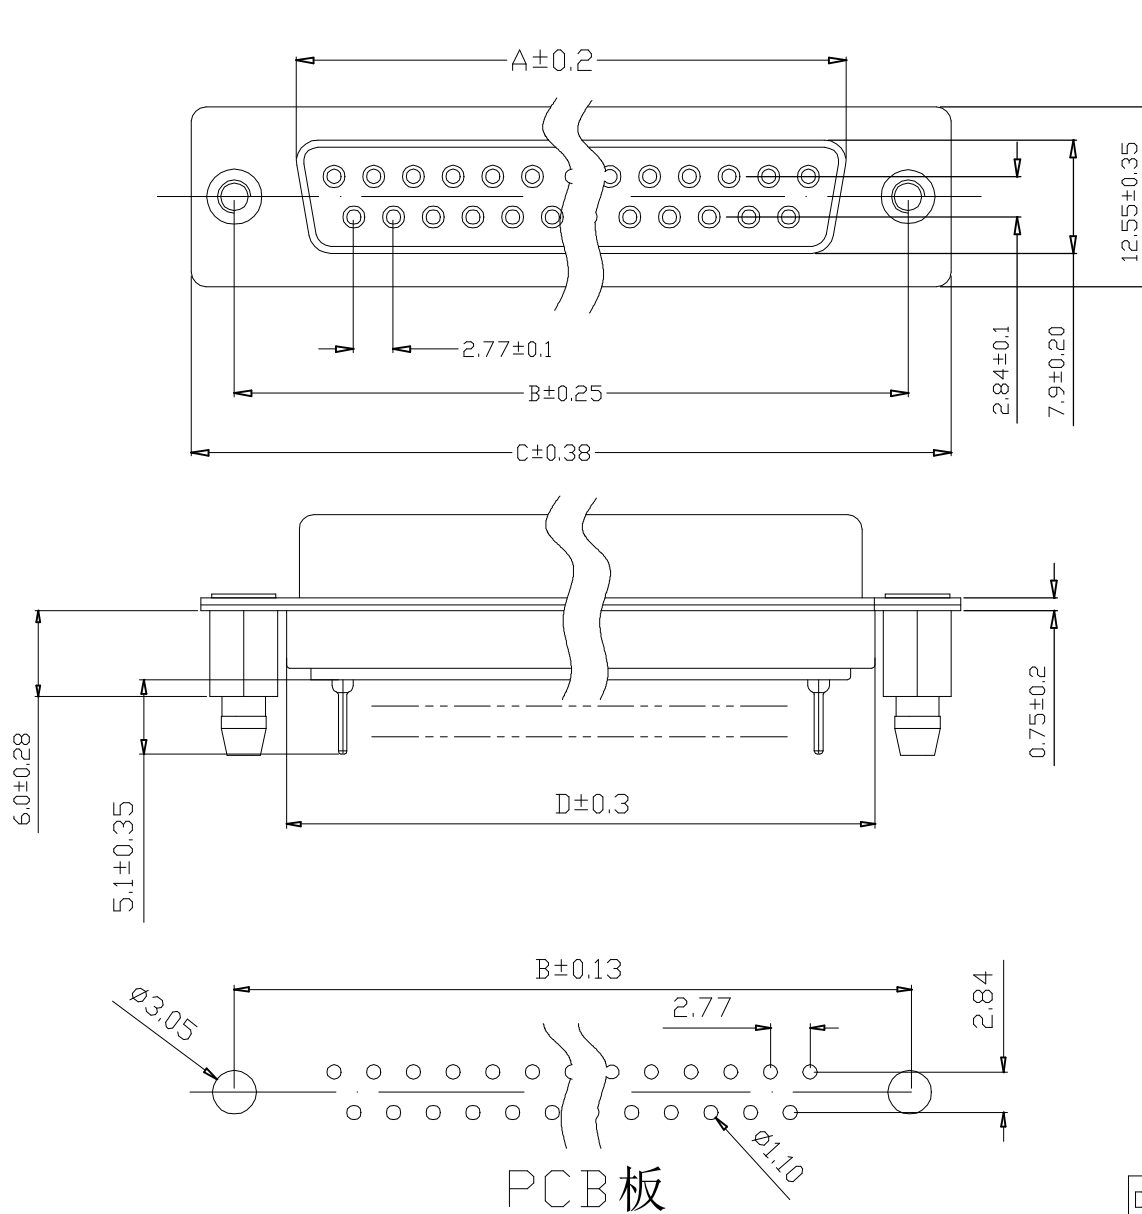

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

* REVISIONS

LTR	DESCRIPTION	DATE	REVISED	APPROVED

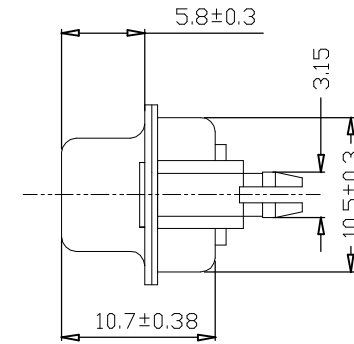

NOTES:

1. SPECIFICATIONS:

Voltage Rating : 250V
Current Rating : 3AMP
Contact Resistance : $30m\Omega$ MAX.
Insulation Resistance: $1000M\Omega$ MIN.at 500V DC
Withstanding Voltage : 500V Per minute
Temperature Range : $-25^{\circ}C \sim 85^{\circ}C$

2. MATERIALS:

Housing : PBT+30% Glass Fiber BLUE/BLACK/WHITE
Contacts: Brass H62 G/F Plated in contact area,
Tin Plated Solderfalls over Nickel
Shell : Spcc, Front shell Nickel plated.
Back shell Tin Plated

JCD-DPDFXX-GD02

PIN NO.	A	B	C	D
09	16.25	25.00	30.80	19.00
15	24.65	33.30	39.20	27.70
25	38.30	47.00	53.00	41.20
37	54.80	63.50	69.40	57.30

DWN	LILY	DATE	2025.05.13	3RD ANGLE PROJECTION	NAME
CHKD	ANDY	DATE	2025.05.13		DB (F) 插板式後鉤魚叉鎖螺絲 (5.8螺絲)
APVD	JON	DATE	2025.05.13	UNIT: mm	CAT. NO.
JKCR Electronics Co., Ltd.					JCD-DPDFXX-GD02
					DWN.NO.
					ZM-DPDFXX-GD02
					001