

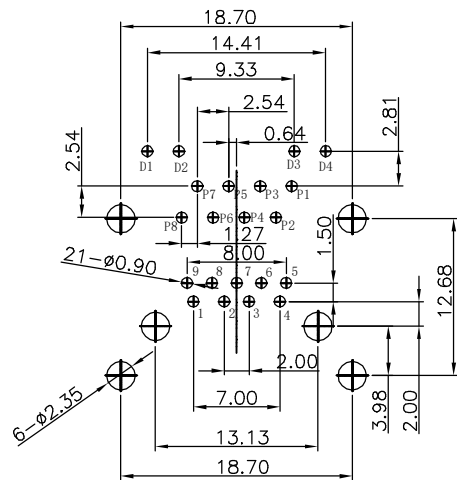
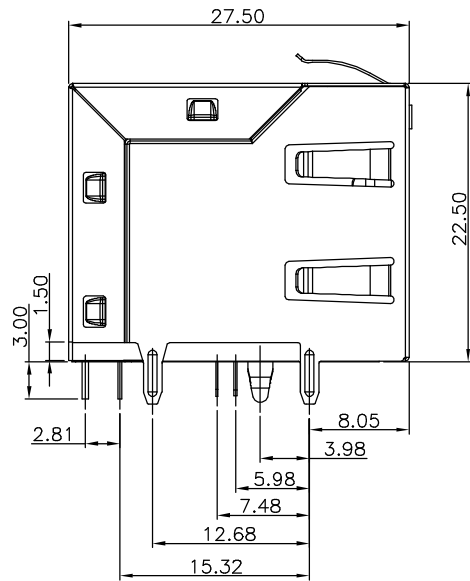


* RoHS COMPLIANT *

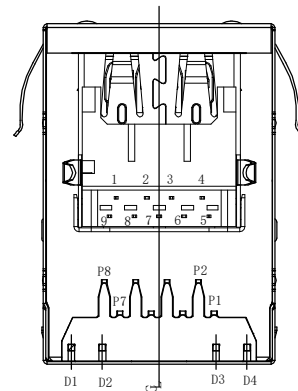

RECOMMENDED P.C.B LAYOUT
TOP VIEW (COMPONENT SIDE)

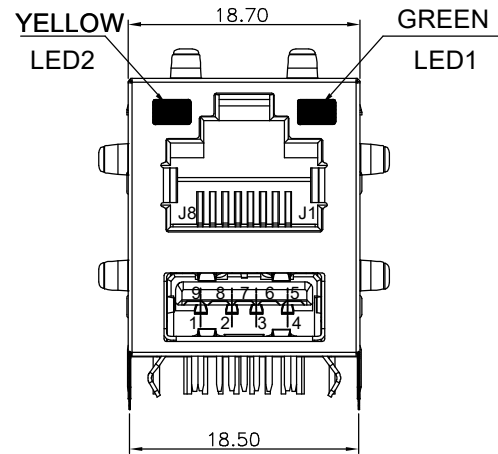


BOTTOM VIEW


Notes:

- 1.Meets for exceeds IEEE802.3 standards
- 2.Materials:
 - 2.1.Housing: Thermo plastics,PBT ,BK,UL94V-0
 - 2.2.Insert Base : Thermo plastics.PBT.BK.UL94V-0
 - 2.3.Contact: Phosphor Copper
 - 2.4.Shell: Alloy
 - 2.5. Contact: Tin Plating 100u" on solder tail area,
 - 2.6.RJ45 Gold plating Flash on contact area.
 - 2.7.USB Gold plating Flash on contact area,
 - 2.8.30u" min Ni underplating over all.

Schmetics:

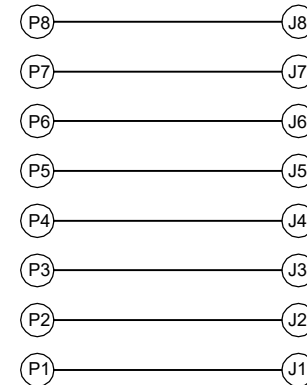

LED Information:

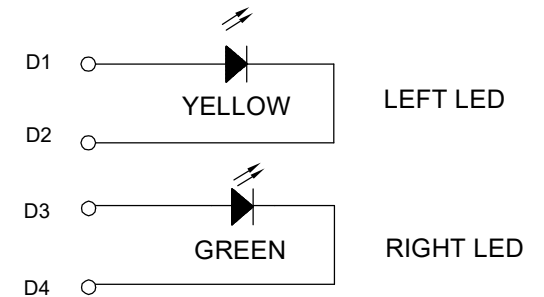

DWN	LILY	DATE	2023.01.13	3RD ANGLE PROJECTION	NAME RJ45 w/LED + U3.1 Gen. 2
CHKD	ANDY	DATE	2023.01.13		CAT. NO. JCRU-ELU1J1G-01A4D0F
APVD	JON	DATE	2023.01.13	UNIT: mm	DWN.NO. EX-ELU1J1G-01A4D0F
JKCR Electronics Co., Ltd.					001

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3