

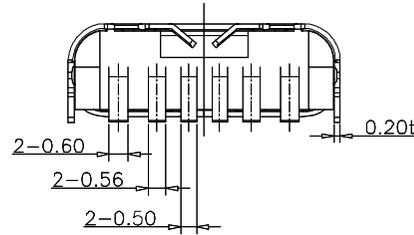
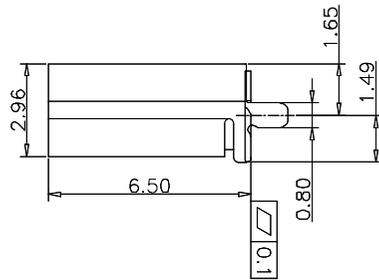
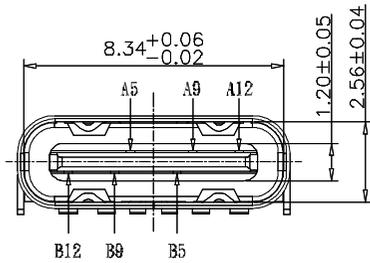
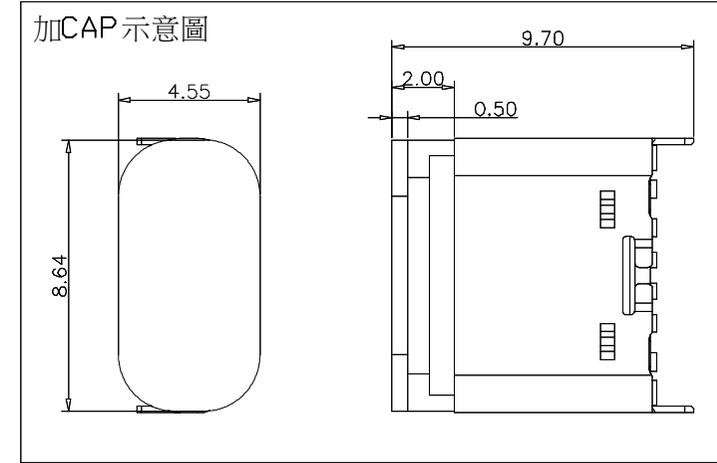

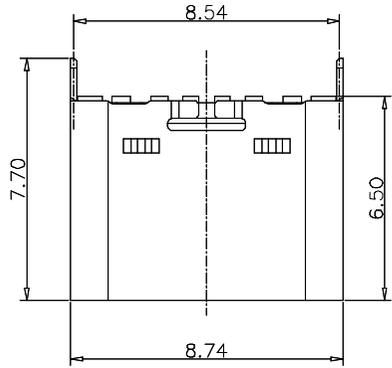


\* RoHS COMPLIANT \*

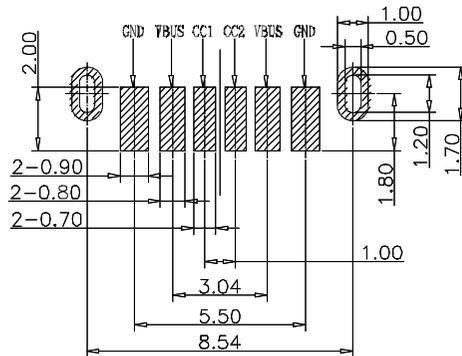

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

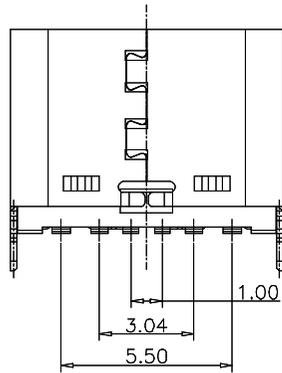

RECOMMEND P.C.B LAYOUT  
TOLFRANCF UNSPFCIFIFD +0.05mm

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ±0.3

\* REVISIONS

LTR	DESCRIPTION	DATE	REVISED	APPROVED

TABLE:

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
5	COVER	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
4	SHIELDING PLATE	STAINLESS STEEL	NO Plated	1PCS
3	SHELL	STAINLESS STEEL	Ni:50u" Plated	1PCS
2	CONTACT	COPPER ALLOY	Au1u"/Ni:50u" Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS

DWN	LILY	DATE	2022.04.29	3RD ANGLE PROJECTION	NAME USB C TYPE 單排6PIN 直立式SMT L=6.5mm	
CHKD	ANDY	DATE	2022.04.29			
APVD	JON	DATE	2022.04.29	UNIT: mm	CAT.NO. JCU-JDR-USCF057-S008	
JKCR Electronics Co., Ltd.					DWN.NO. KQ-JDR-USCF057-S008	002