* HALOGEN FREE *

✳ REVISIONS				
LTR	DESCRIPTION	DATE	REVISED	APPROVED

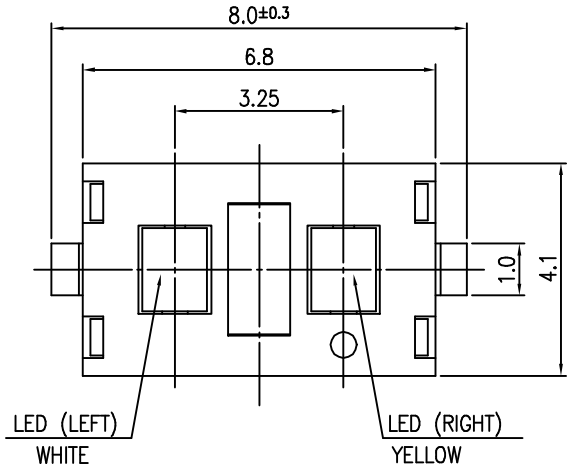

SCHEMATIC



SPECIFICATIONS			
RATING	DC12V 50mA	TIMING	
CONTACT RESISTANCE	500mΩ MAX.	OPERATION (TORQUE)	160^{+75}_{-30} gf.
INSULATION RESISTANCE	DC500V−100MΩ MIN.	STROKE (ANGLE)	$0.25^{+0.2}_{-0.1}$ mm
WITHSTAND VOLTAGE	AC250V−1 MINUTE	LIFE CYCLES	100,000 CYCLES



JCSW−NTC3001−CCG−C16001−BB



JCSW−NTC3001−CCG−C1601−BX

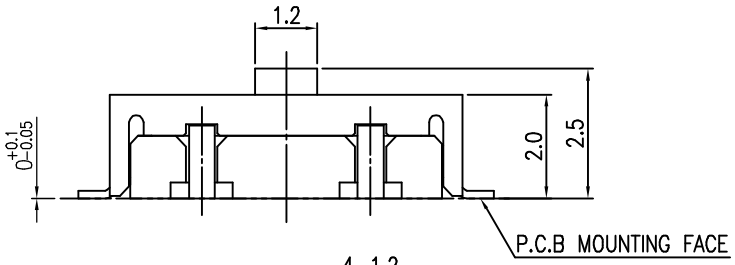



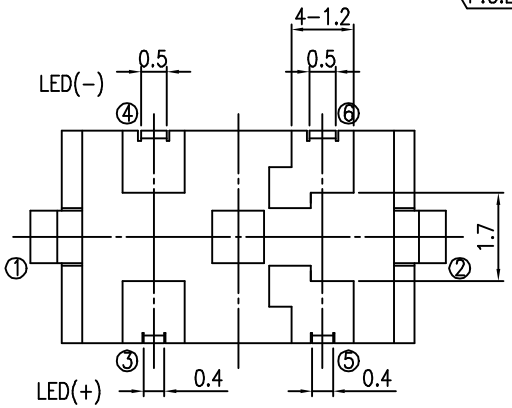

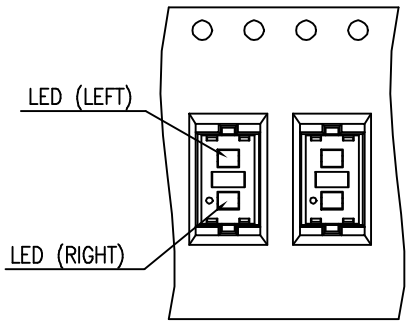

CARRIER TAPE

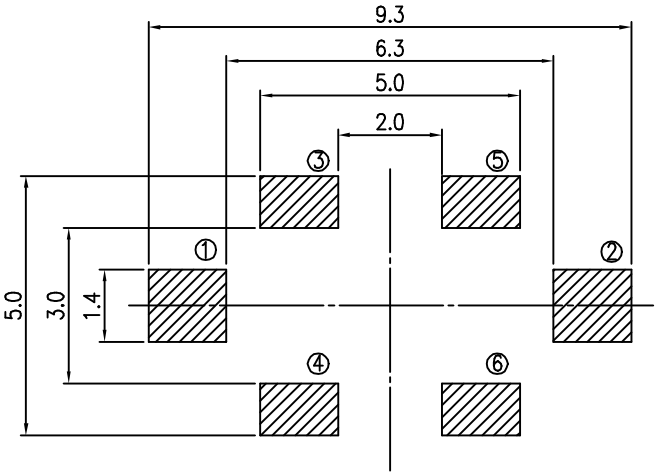

HATCHED AREA SHOWS SOLDERING LAND

(TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.1)

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ±0.2

DWN	LILY	DATE	2020.06.09	3RD ANGLE PROJECTION	NAME TACT SWTICH
CHKD	ANDY	DATE	2020.06.09		CAT. NO. JCSW−NTC3001−CCG−C16001−WY−AA
APVD	JON	DATE	2020.06.09	UNIT: mm	
JKCR Electronics Co., Ltd.					DWN.NO. AA−NTC3001−CCG−C16001 001